

SNTX SERIES




FEATURES


- | Two wheel design for increased coverage
- | Swinging door cabinet allows overhead loads to be placed directly onto table center for accuracy and efficiency
- | Unique 3-position turntable provides more efficient cleaning.
- | Indexes to front, center and rear of the blast pattern creating varying impingement angles
- | Reduces the need to reposition parts
- | Integrated dust collector (removable)

DRUM BLAST MACHINE


OPTIONAL TABLE
DESIGN OFFERS
REBOUND CLEANING

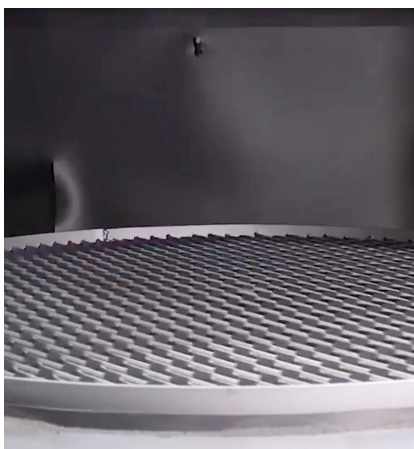

LOAD PARTS OVERHEAD
EASILY WITH
SWINGING DOOR

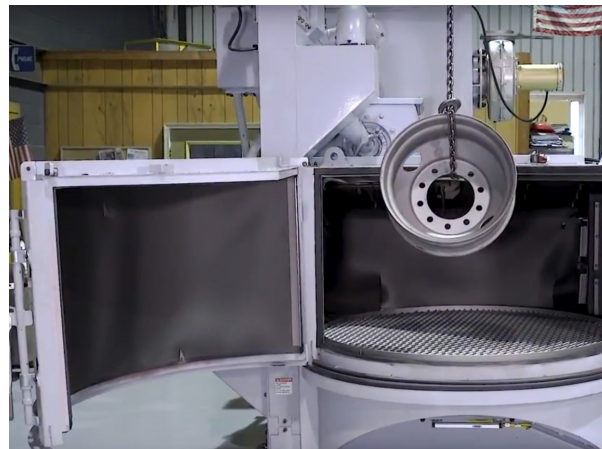


TIGHT SEAL REDUCES
ABRASIVES & DUST FROM
LEAVING THE CABINET

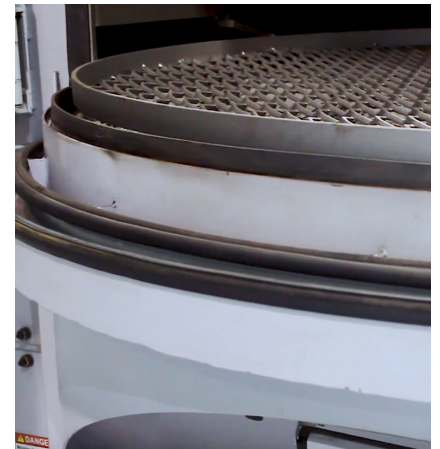

SNTX[®]SERIES

DIMENSIONS

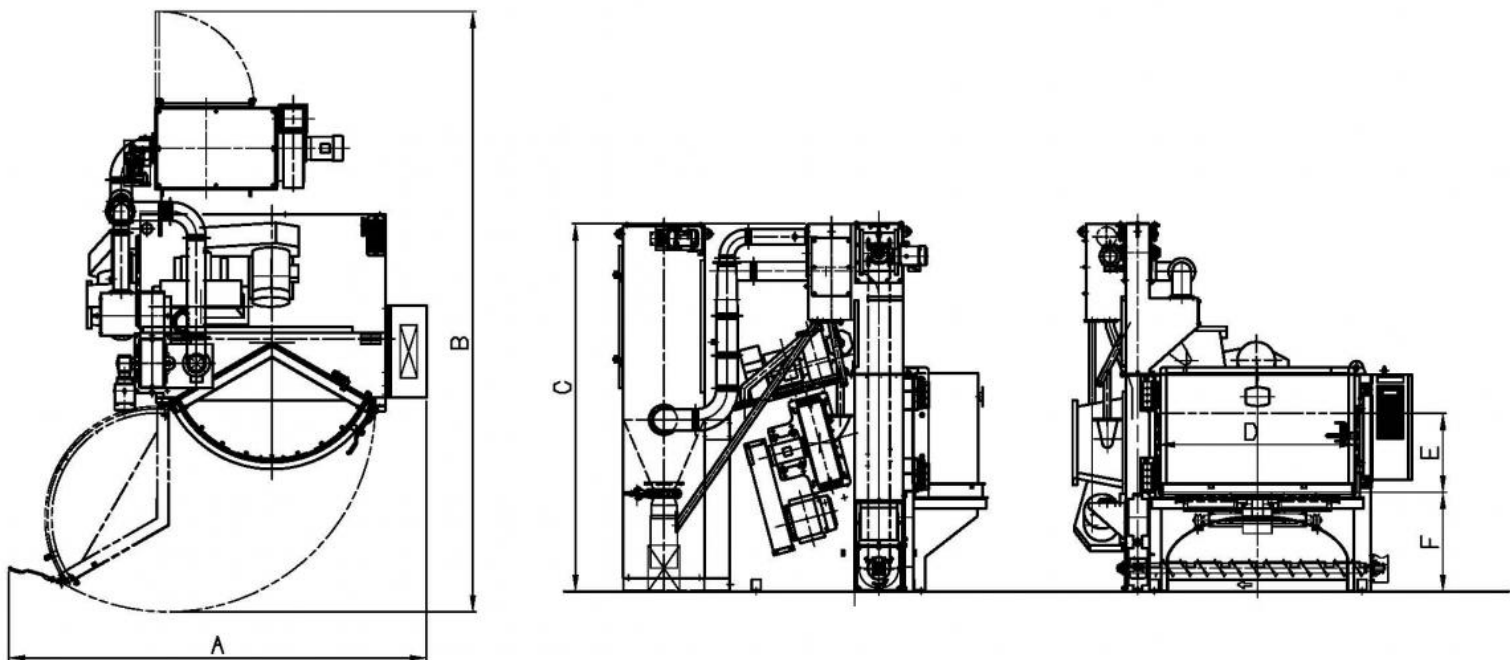

SPECIFICATIONS

Machine Model	Width	Length	Height	Table Dia.	Cleaning Envelope		Table Ht.	Workload Capacity	3 Point Stop Indexing Table	Blast Wheel		Required Ventilation
	"A"	"B"	"C"		Ø "D" x "E"		"F"			Model	Power x Qty	
SNTX-I	85" (2,159mm)	91" (2,311mm)	103" (2,616mm)	31.5" (800mm)	Ø31.5" (800mm)	16" (406mm)	29.5" (749mm)	880 lbs. (399 kg.)	Not equipped	Y-30	7.5HP x (1)	360 CFM
SNTX-II	101" (2,565mm)	159" (4,039mm)	110" (2,794mm)	47" (1,194mm)	Ø47" (1,194mm)	24" (610mm)	29.5" (749mm)	1540 lbs. (698.5 kg.)	Equipped	Y-30	7.5HP x (2)	720 CFM
SNTX-III	125" (3,175mm)	177" (4,496)	110" (2,794mm)	59" (1,499mm)	Ø59" (1,499mm)	24" (610mm)	29.5" (749mm)	1540 lbs. (698.5 kg.)	Equipped	Y-30	7.5HP x (3)	720 CFM



SINTO AMERICA, INC.

SINTOKOGIO GROUP

3001 W. Main Street, PO Box 40760

Lansing, MI 48901

Tel: 517 371 2460 Fax: 517 371 4930

Web: www.sintoamerica.com Email: sales@sintoamerica.com

